



LEINOS WHITE LACQUER 820

The White That Breathes.

The natural white lacquer for wood, windows and doors — open-pored, low-solvent, calm by design.





THE SEALED-IN WHITE

Most white finishes seal the wood shut.

*Ordinary enamel locks the wood under a plastic skin,
holds its smell, and yellows to cream
a season or two into the heat.*


It does not have to.



THE REFRAME

A white that lets the wood breathe.

*Open-pored and vapor-permeable — protection without
suffocation. High opacity, minimal yellowing, satin or gloss.
The calm white for sensitive homes.*

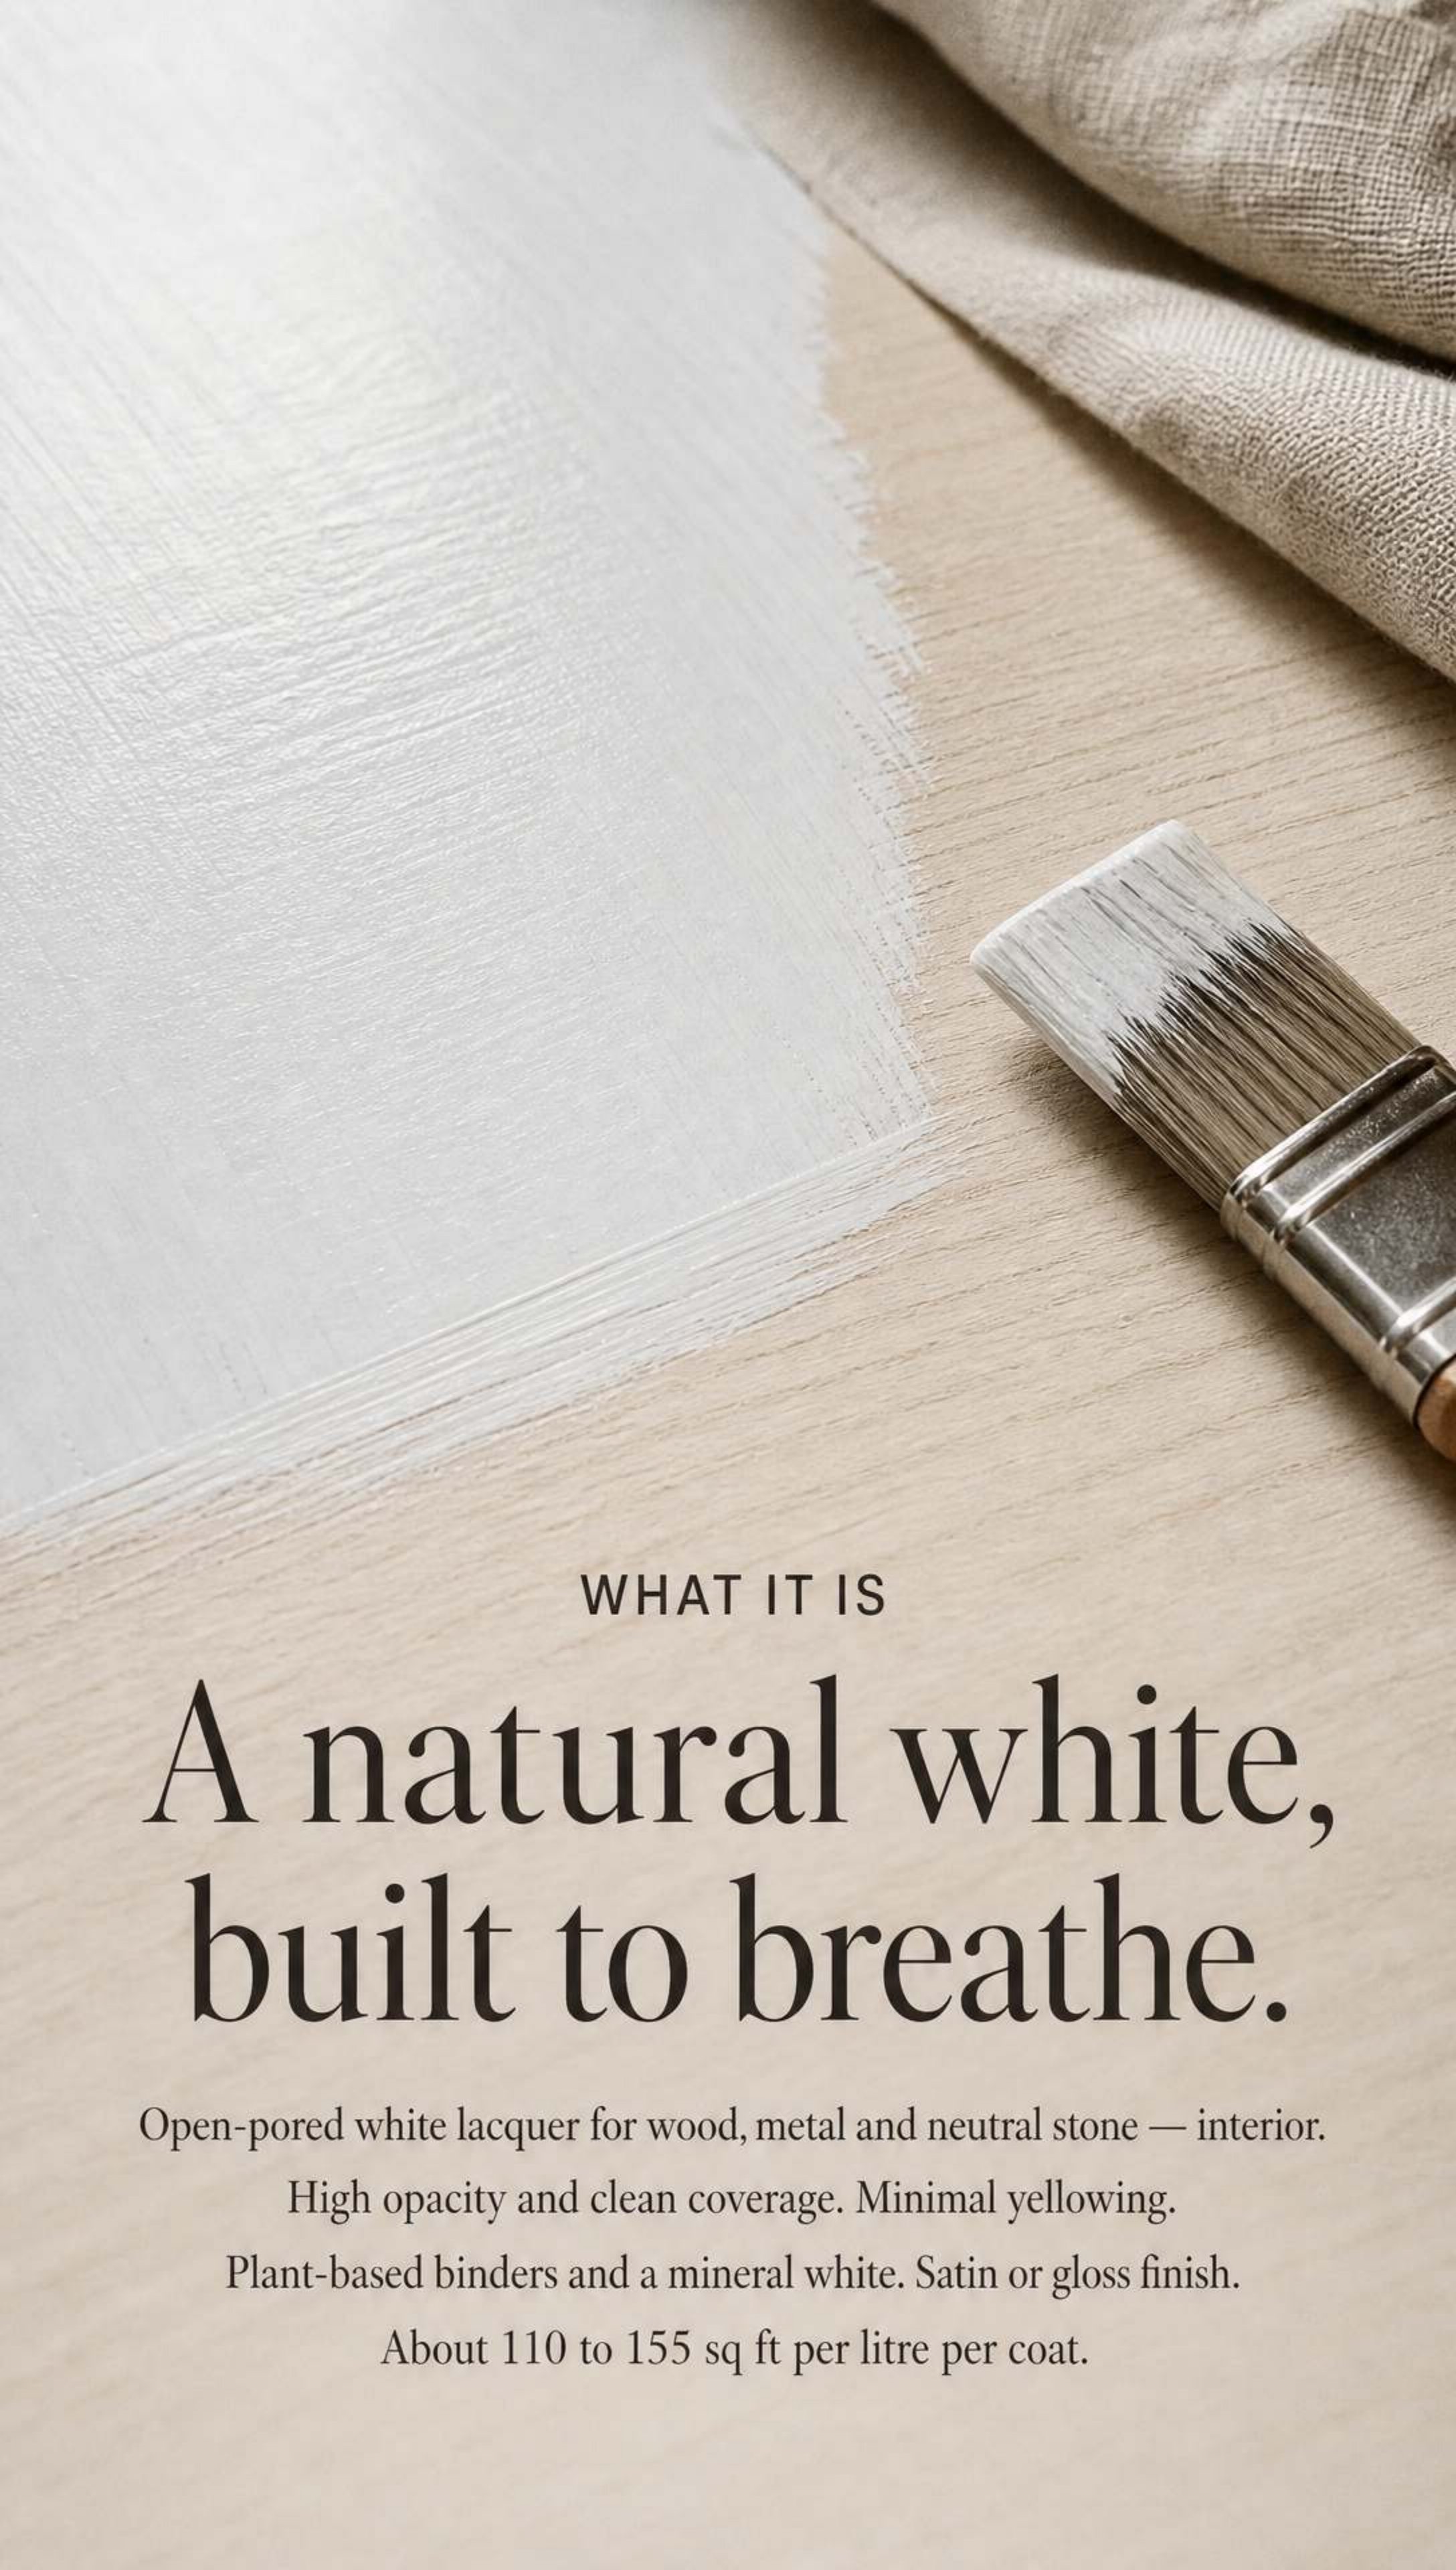

WHAT IT IS

A natural white, built to breathe.

Open-pored white lacquer for wood, metal and neutral stone — interior.

High opacity and clean coverage. Minimal yellowing.

Plant-based binders and a mineral white. Satin or gloss finish.

About 110 to 155 sq ft per litre per coat.

1 —



2 —



3 —



THE FULL SYSTEM

Prime. Then the white.

- 1 • Resin Lacquer Primer 810 — fast-dry, sanded, filling base for wood, metal, stone
- 2 • White Lacquer 820 — open-pored natural white topcoat, two thin coats, satin or gloss
- 3 • Bare or absorbent wood? Prep with Impregnation Primer 150 first

*Want colour instead of white? See Finishing Lacquer 840.
Clean tools with Thinner 200.*



HONEST ABOUT WHAT'S INSIDE

Honest about what's inside.

Toy-safe cured film — tested to DIN EN 71-3 and DIN 53160.
Open-pored and vapor-permeable — the wood keeps breathing.
Low solvent — not zero, and we say so. Ventilate as it dries.
Suitable for allergy sufferers, subject to medical advice.



HONEST COMPARISON

White lacquer. vs Gloss enamel.

	WHITE LACQUER 820	ORDINARY GLOSS ENAMEL
YELLOWING	minimal — stays white	yellowes to cream fast
BREATHABILITY	open-pored, wood breathes	sealed plastic film
BINDER	plant-based + mineral white	petro-solvent, often smells
CURED FILM	toy-safe (DIN EN 71-3)	not declared
REPAIR	sand and recoat in place	strip and start over



INVESTMENT

Cover calmly. Keep it white.

From about ₹45 per square foot per coat (2.5 L).

2.5 L covers about 318 sq ft per coat.

Also in 0.75 L and 0.25 L for doors, frames and touch-ups.

Satin or gloss — the same natural white.





THE RITUAL

Prime. Sand. Then lay the white.

Prime with Resin Lacquer Primer 810 (or 150 on bare wood) · sand lightly between coats.

Brush, roll or spray two thin coats · above 15 °C · full cure in 3 to 6 days.

Solvent-borne — keep the room ventilated · clean tools with Thinner 200.



APPLICATION TECHNICAL

For the specifier.

Substrate	• interior wood, metal, neutral stone — not floors or radiators
System	• prime with 810 (or 150 on bare wood) • sand lightly between coats
Coats	• two thin coats • brush, roll or spray • above 15 C
Drying	• touch-dry 8 to 10 h • recoat after ~24 h • full cure 3 to 6 days
Coverage	• about 110 to 155 sq ft per litre per coat • satin or gloss
Compliance	• open-pored • DIN EN 71-3 + DIN 53160 • VOC within EU Cat d (limit 300 g/l)



PROFESSIONAL TRUST

Specified for sensitive interiors.

*From panelled doors and window frames
to wardrobes and trim — an open-pored natural white
that lets the wood breathe and stays toy-safe once cured.*

Interior wood, metal and neutral stone. Not for floors or radiators.



NEXT STEP

Bring a calmer white home.

A LEINOS specialist is one reply away.

*We will help you choose satin or gloss and calculate
the quantity your doors, windows and furniture need.*

WhatsApp · +91 9997897474

sales@leinos.in · www.leinos.in

LEINOS Organic Paints Pvt. Ltd.

Khasra No. 646/1, Road No. Zero,
Bakshi Farm Road, Ghitorni, 110030 New Delhi

